INGROUND TRAMPOLINE

Build Sheet

Turnkey inground trampolines, dug and built anywhere in North Texas.

Text Joey
(214) 930-3109



A real Jumpy Joey job

One price for the whole job

Turnkey means the trampoline and all the work to put it in the ground. $7,409 to $10,348, plus tax. Most installs take one day.

- ✔ The trampoline, made for the ground, with the retaining wall built into the frame
- ✔ The dig, by machine, typically 48 inches deep
- ✔ Weed barrier and a gravel base
- ✔ An electric sump pump and drain line in every pit
- ✔ The build, set in the pit, backfilled and bermed
- ✔ The dirt spread and reused on site, in most yards
- ✔ Sprinkler lines rerouted around the pit

How it goes

1. **Text me your yard.** A few photos of the spot and the size you like. I text back a firm price.
2. **We walk the yard.** Before any digging I look at the spot, the access and the drainage.
3. **You call 811.** It is free and marks the buried lines. Text me the ticket number.
4. **Dig day.** We dig, set the drain and pump, build it and clean up. Usually one day.

> Inground trampolines are a real construction job. That is why every pit I dig gets a sump pump and a drain line.

INGROUND TRAMPOLINE BUILD SHEET

Models and turnkey prices

Every price below is turnkey: the trampoline, the dig, the pump and drain, and the build. Plus tax. Prices as of November 2026. I confirm the price for your yard by text.

Akrobat

Very bouncy, with pad colors to pick from and LED lights included

SIZE	MODEL	TURNKEY
17 x 12 ft	XCITYX The one in my own backyard	**$10,348**
17 x 10 ft	Primus Flat	**$8,998**
14 x 10 ft	XCITYX	**$9,488**
14 x 10 ft	Primus Flat	**$7,894**
12.5 x 8 ft	Primus Flat	**$7,774**
11 x 8 ft	Primus Flat	**$7,674**
10 x 6 ft	Primus Flat The smallest rectangle on my list	**$7,735**
14 ft round	Primus Flat	**$7,674**
12 ft round	Primus Flat	**$7,564**
10 ft round	Primus Flat	**$7,509**
8 ft round	Primus Flat The smallest on my list	**$7,409**

Avyna

Fair priced and stocked locally, with gray pads and a black mat

SIZE	MODEL	TURNKEY
15 x 15 ft square	Pro-Line MAX One of the largest inground sizes made	**$9,595**
18 x 12 ft	Pro-Line MAX One of the largest inground sizes made	**$9,395**
17 x 10 ft	Pro-Line	**$8,335**
14 x 10 ft	Pro-Line	**$7,835**
15 ft round	Pro-Line	**$7,735**
14 ft round	Pro-Line	**$7,535**
12 ft round	Pro-Line	**Text me for it**

North

Very bouncy and stocked locally, with gray perforated pads

SIZE	MODEL	TURNKEY
17 x 12 ft	North	**$8,649**
15 x 10 ft	North	**$7,839**
12 x 8 ft	North	**$7,439**
14 ft round	North	**$7,539**

Not sure which size?

Leave about 5 ft of open lawn on every side of the pad. The 12 x 17 is the size in my own backyard, and the 10 x 17 suits a gymnast.


Try the finder at **jumpyjoey.com/inground-trampolines/finder**. It matches your yard, your jumpers and your budget.




How it sits in your yard

The frame sits just above the grass and the dug soil is shaped up to it, so it looks flush and rain runs away from the pit, not into it. Have your own contractor? I send these dig specs so they dig the right hole.

In a level yard

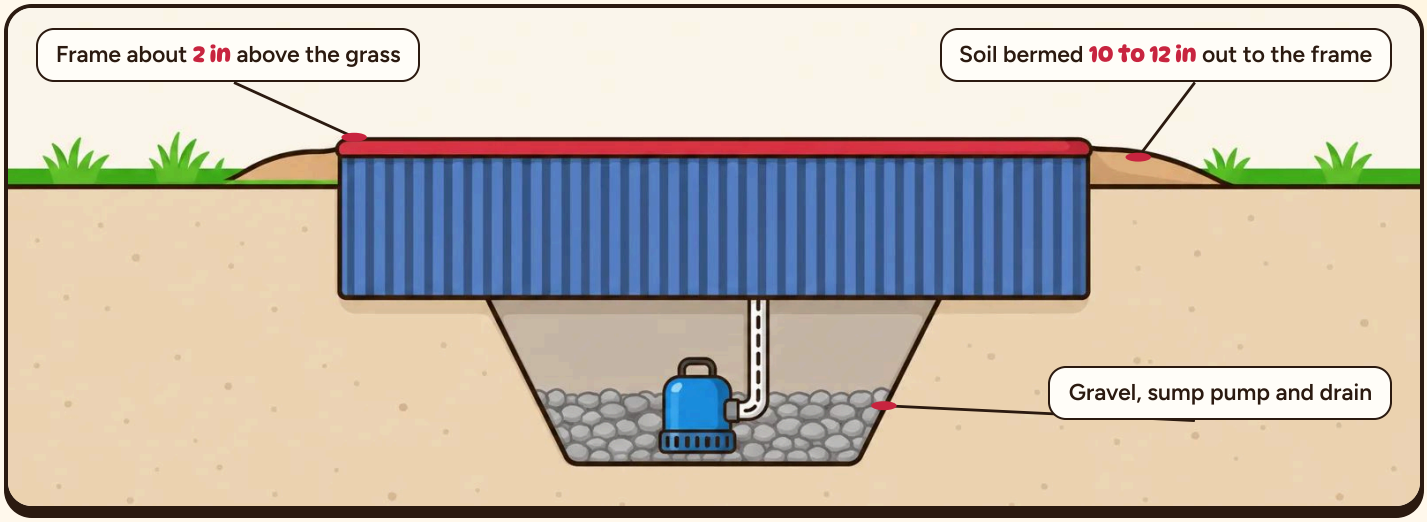

In a sloped yard (the frame stays level)

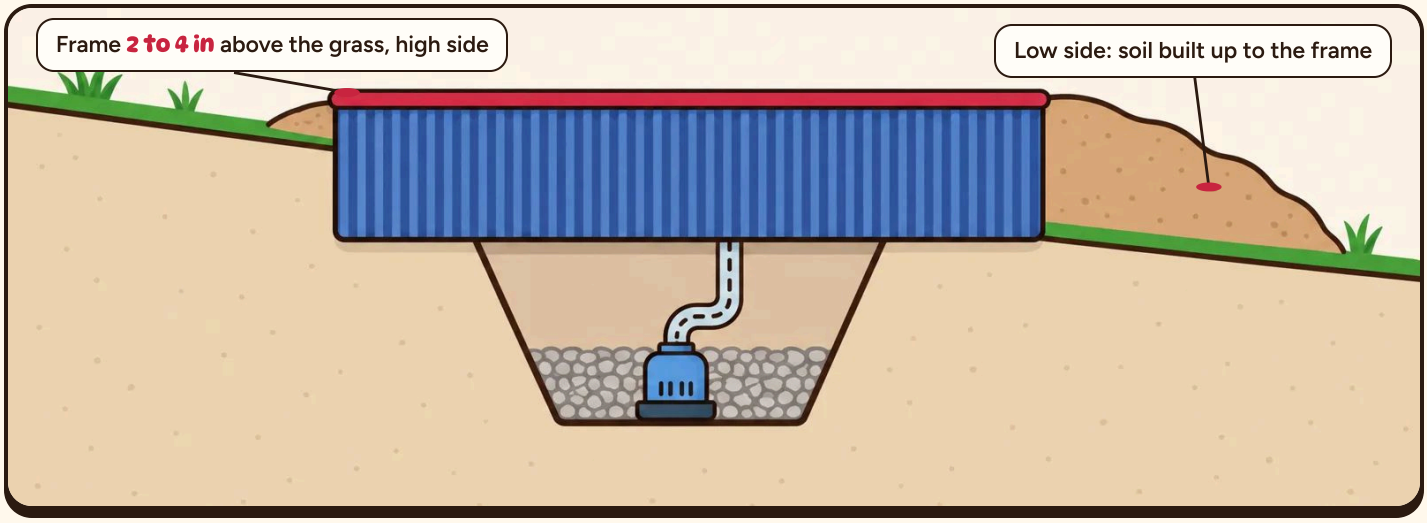

Why families pick inground

- ✔ Walk-on access. No ladder and no crawling through a net door.
- ✔ No fall from height off the side. Lower to the ground means less fear for first-time jumpers.
- ✔ Grown-ups use it too. Easy on, easy off, with a solid bounce.
- ✔ Storm safe. It will not blow away like an above-ground one can.
- ✔ A clean, low look that sits flush with the lawn.
- ✔ It gets used more. We put one in our own yard in 2024, and it gets jumped on nearly every day.

Two myths. Snake pits? No. I have been in hundreds of these pits and have yet to see one. **Mosquitoes?** Not when the pit drains, and every pit I dig has a drain and a pump. A pit put in wrong can sink or hold water, which is what the drain and pump are for.


INGROUND TRAMPOLINE BUILD SHEET

Extras and good to know

What can add to the price

Dirt haul-off Only when the dirt cannot stay. Most yards reuse it.	**$600 a load**
Sod around the work area	**$900 a pallet**
Large rock in the dig	**$600**
LED lights with remote Included with Akrobat	**$299 plus tax**
Enclosure net Extra on most inground models. One can go on later.	**By text**
Hand digging When the machine cannot reach the spot	**By the trampoline**
Moving the main sprinkler line Other sprinkler lines are included	**When we find it**
Hardwiring the pump I stub out the wiring and bury an outdoor extension cord	**An electrician's quote**



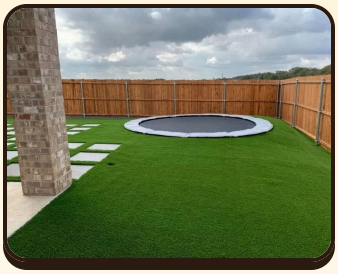

Other ways I can help

Just the trampoline. Bought without the install, I can normally take $200 off retail. I send the dig specs so your contractor digs the right hole.

Install only. Already have one made for the ground? Install only starts around $5,000.

Fix or remove a pit. I repair pits other contractors built, which usually means a pump or drain done wrong. I also take inground trampolines out and fill the pit.

Keep it bouncing. Pumps fail, mats tear, springs wear out and pads fade in the sun. I do all of that repair work too.

Paying

Cash, check, bank transfer, Zelle, Venmo, Cash App, Apple Cash or PayPal, and you can mix them. Cards carry a 3% fee.

Financing

Through Advancial Federal Credit Union. Advancial's Visa Rewards Plus card has 0% intro APR for the first 6 months on purchases. After that the APR is 9.90% to 16.90%, based on creditworthiness. No annual fee.

Warranty

1 year on my workmanship and the sump pump and drainage, plus the maker's warranty on the trampoline.

Ready for a price?

Text me a photo of the spot and the size you like. I answer within minutes, most days.

(214) 930-3109
jumpyjoey.com